


Pneumatic rotating transport arms BP66

Features

- Transport and assembly of different parts
- High speed and precision
- Repeatability of sequences
- Numerous application possibilities
- Independently adjustable picking up and setting down positions
- Independently adjustable movement speeds
- Hydraulic shock absorbers at the end of the rotation
- Carbide travel stops



To order these pneumatic rotating transport arms

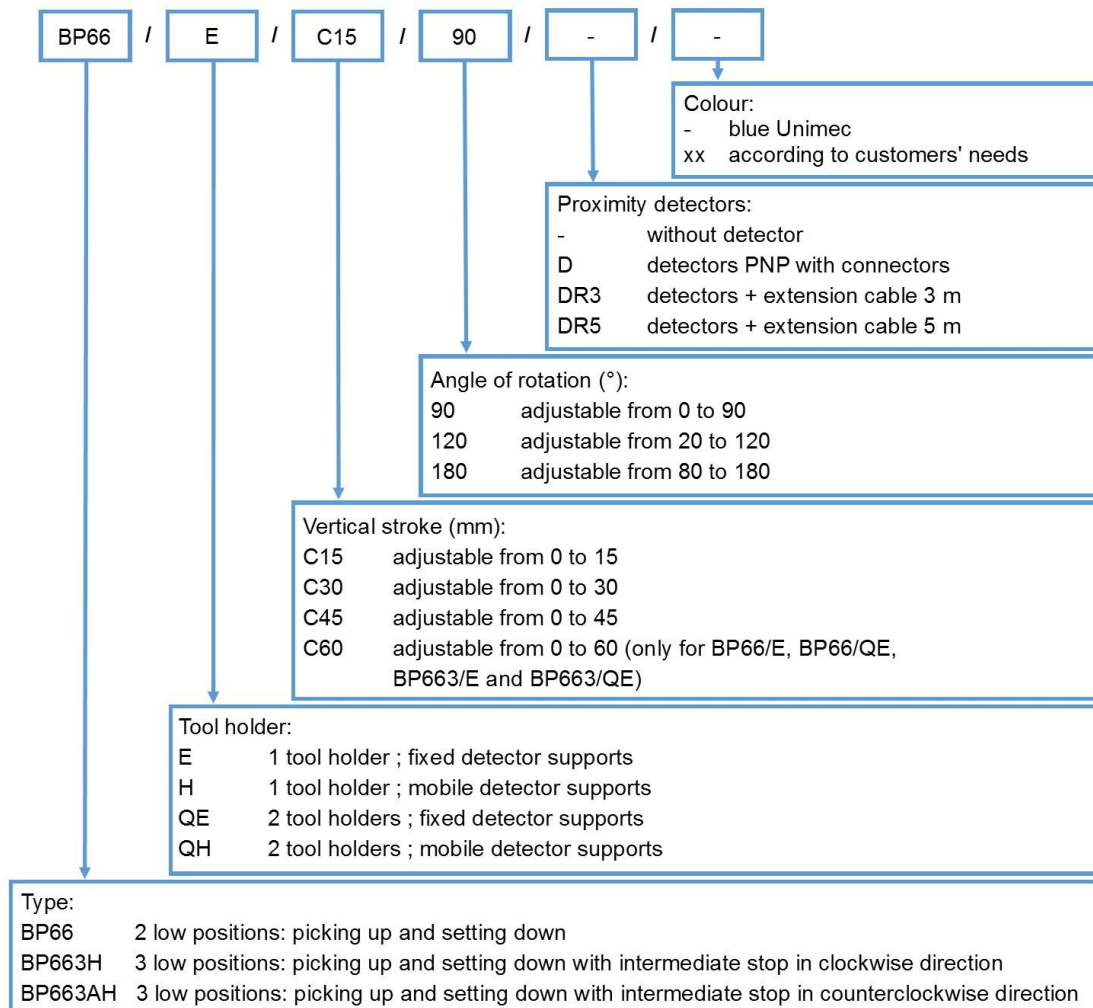

Technical data


Angular accuracy (")	15
Load moment of inertia (kg.m ²)	0,008
Torque (N.m)	0,6
Vertical force (N)	150
Working pressure (bar)	3 - 6
Working rate (cycles/mn)	from 20 to 50
Net weight (kg)	1,6 and 2,2

Options

Positioning slides
Tool holders
Pressure and vacuum units



Dimensions and plan – BP66/H

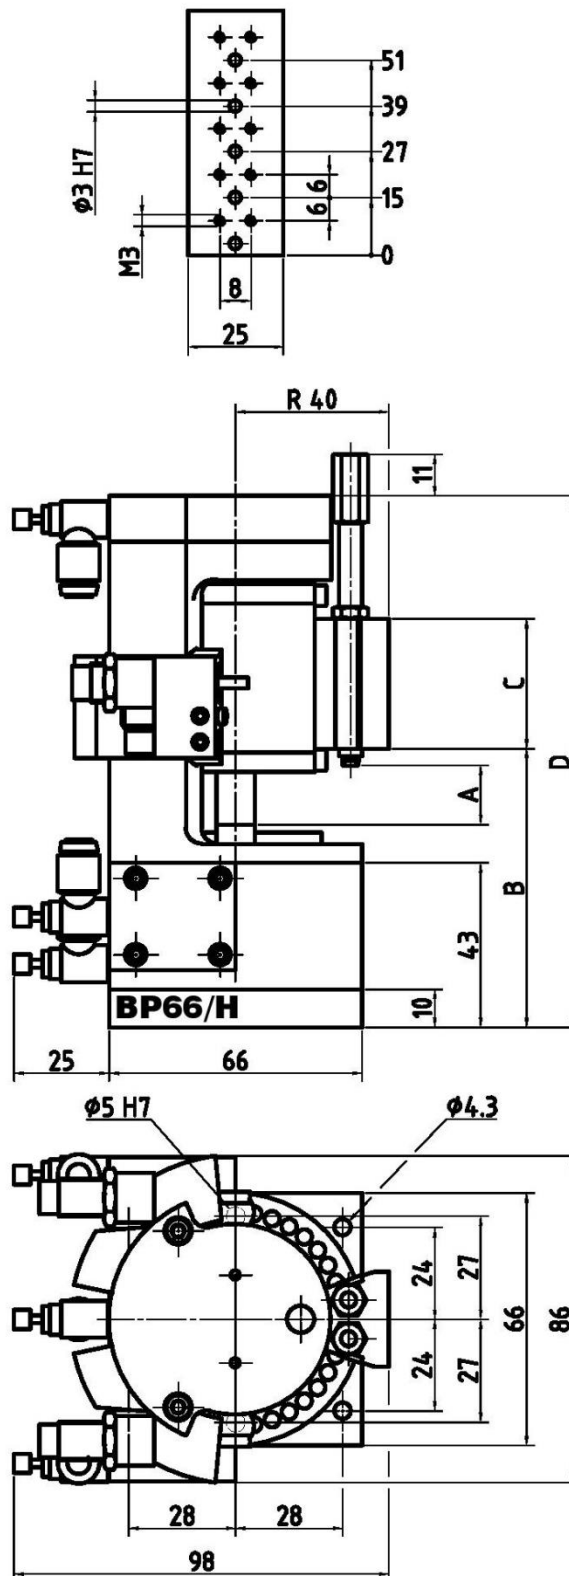

	A	B	C	D	E	F	G
BP66/H/C15	15	73	34	139	-	-	-
BP66/H/C30	30	88	49	169	39	-	-
BP66/H/C45	45	103	64	199	39	51	-

