




UNIMEC


Indexing tables TPP90 and TPP150

Features

- Rotation with indexing system
- Controlled by a rack and pinion mechanism
- For incorporation into rotating automatic transport or assembly machines
- Hydraulic shock absorber at the end of the rotation
- Fine pitch stop screws made of hardened steel
- Independently adjustable rotation speeds by flow rate controllers



To order these indexing tables

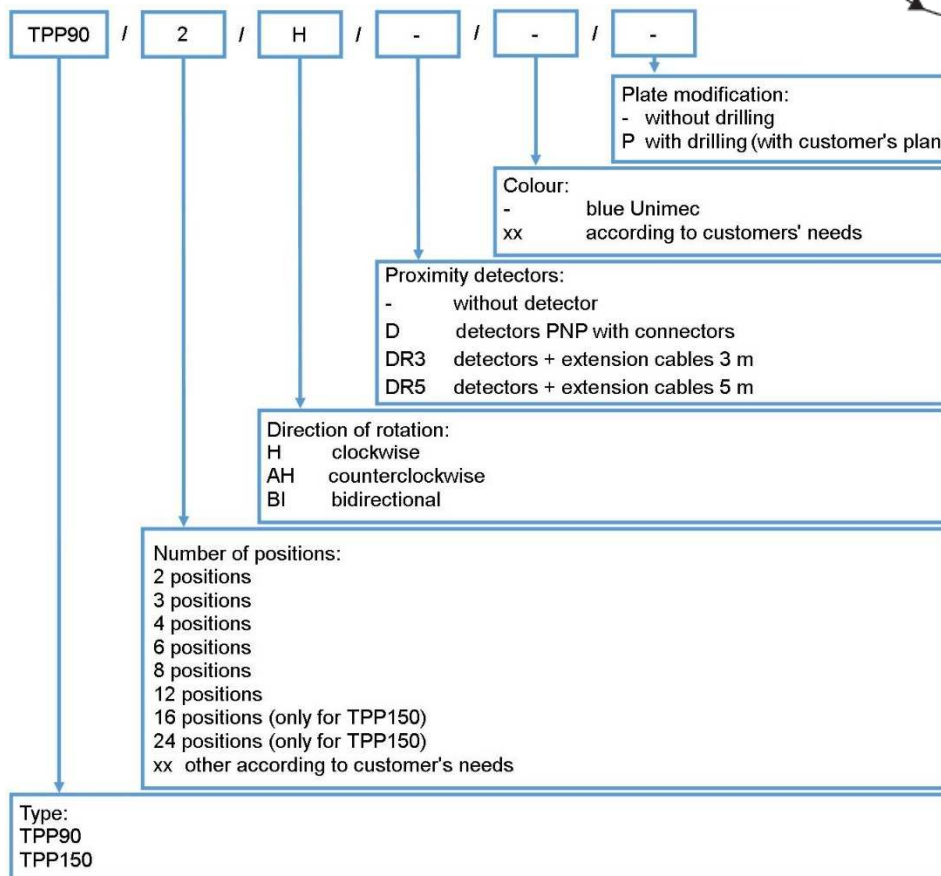

Technical data

	TPP90	TPP150
Number of positions	2-3-4-6-8-12	2-3-4-6-8-12-16-24
Direction of rotation	Clockwise, counterclockwise, bidirectional	Clockwise, counterclockwise, bidirectional
Angular accuracy (")	30	20
Flatness of rotation (mm)	0,01	0,01
Load moment of inertia (kg.m ²)	0,008	0,08
Torque (N.m)	1,2	4
Static load (N)	1500	3000
Working pressure (bar)	3-6	3-6
Net weight (kg)	2	7,9



Dimensions and plan – TPP90

