


Components Feeding UniFeed 812

Description

- Feeding and sorting unit for distribution of components in bulk.
- Highly compact unit.
- Fixation from above or below.
- Two types of connection possible (connection from below avoids visible wiring).
- Various hoppers available, easily interchangeable.
- The vibrating plate is adapted to feed components and easily interchangeable.
- The detection curtain in hopper end part is allowing the feeding optimisation and quality.
- Two control modes available.



Ordering example

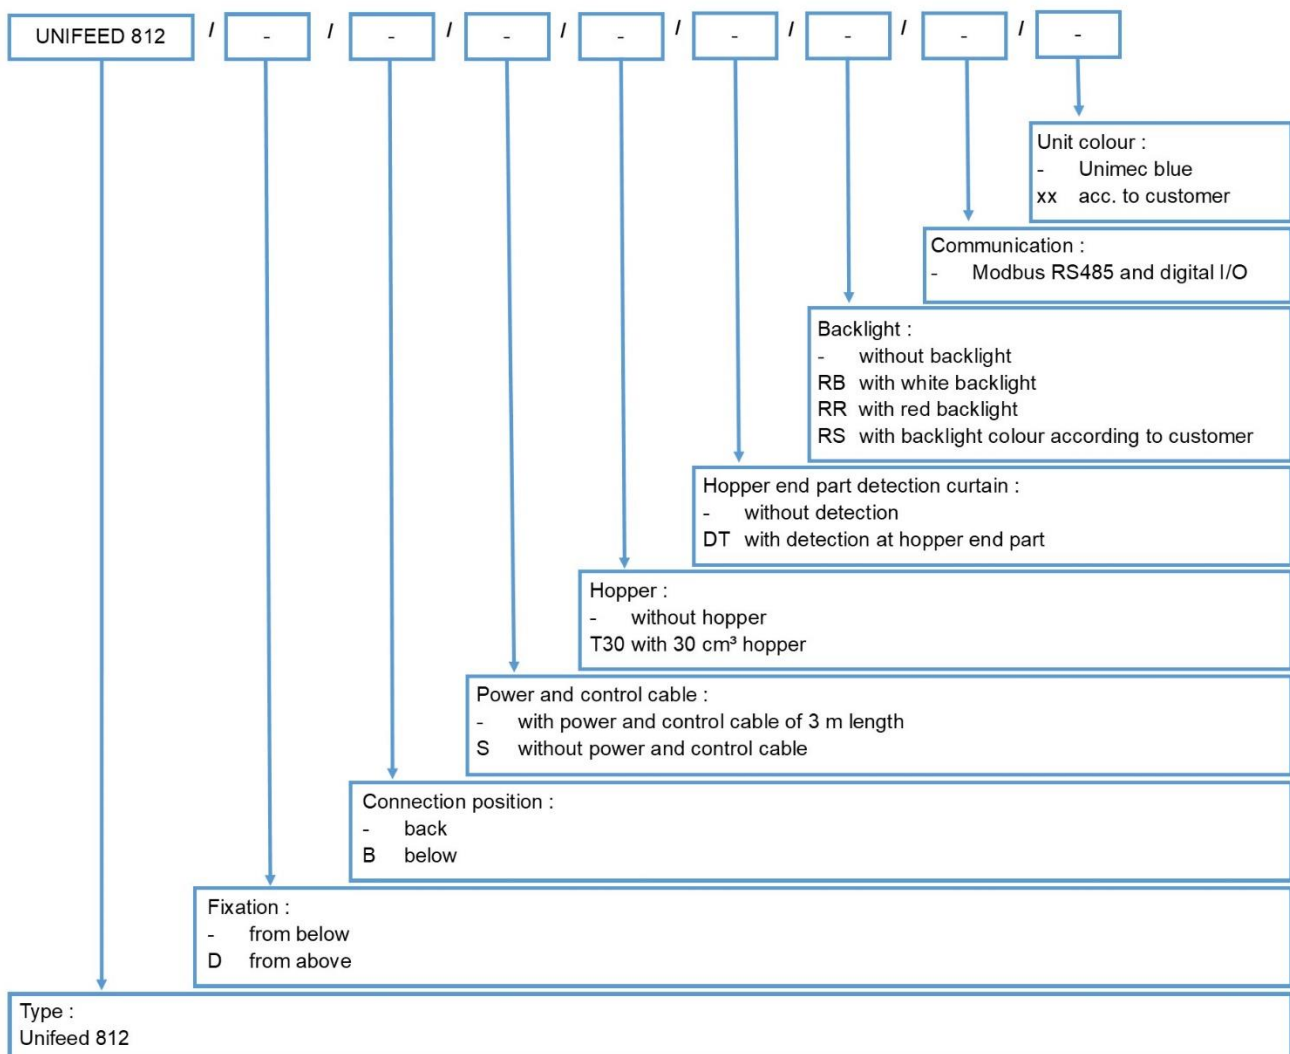

Technical data

Sorting area	28 x 29 mm
Vibration amplitude	from 0.5 to 2.5 mm
Vibration frequency	from 30 to 60 Hz
Backlight	White, Red (and other according to customer wish)
Interface	Input/Output 24 V or industrial serial connection RS485
Voltage	24 V
Weight	750 g

Combinable with

Ionizer
 Pneumatic rotating transport arms
 Electric manipulator robots
 Pressure and vacuum units PV315
 Control boxes

